



STAINLESS STEEL MOUNTINGS


PRODUCTS AT A GLANCE

- ▶ Resists corrosion, heat and chemical damage
- ▶ Ideal choice for food-grade and other hygiene-conscious conditions
- ▶ Significant strength and low maintenance
- ▶ Aesthetic benefits include a sleek appearance that will complement existing machinery
- ▶ Used in conveying machinery, cutting and slicing machines, packaging mechanisms and in other environments where sanitation is a priority




- ▶ When choosing your full solution, Triangle's molded nylon and sintered bronze bearings complement stainless steel mountings

TRIANGLE SERIES AVAILABLE IN STAINLESS STEEL

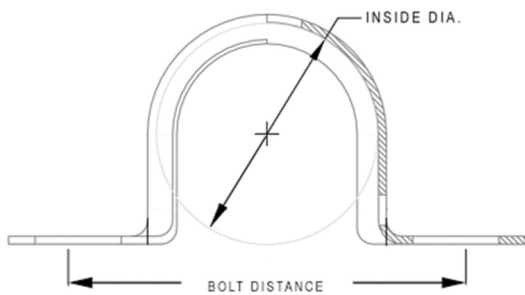

PILLOW BLOCK

Series	Inside Dia.	Bolt Distance
BB	5/6"	2.88"
BC	1"	3.31"
BD	1/2"	1.75"
BE	5/6"	2.97"
BF	1"	3.33"
BJ	1"	3.33"
BK	1-1/4"	3.88"

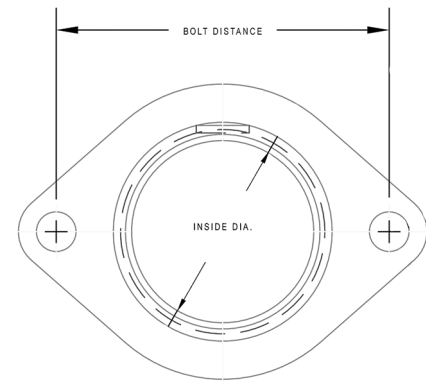

2 BOLT FLANGE

Series	Inside Dia.	Bolt Distance
FA	1-13/16"	2.75"
FB	2-5/32"	3.28"
FC	2-11/16"	3.88"
FD	1-13/16"	1.94"
FF	2-11/16"	2.75"
FM	1-1/8"	2.25"

3 BOLT CENTER FLANGE

Series	Inside Dia.	Bolt Distance
CK	1-1/8"	1.75"
EE	2-3/16"	3.0"
GA	1-27/32"	2.75"

